ROSEBUD D75 / D75 ROSEBUD 1A MODULE TALL OPAL / D75 ROSEBUD 1A MODULE TALL OPAL - GROUND / D75/G1A-3827OP-CO

Product Info

IP65 IK08

Item code	ROSEBUD D75 / D75/G1A-3827OP-CO
Category	Low pole/bollard
Environments	residential lighting, hallway
Mounting type	ground surface
Body	AISI 304 polished stainless steel body.
Painting	Polyester powder coating, with a pluri-processed against corrosion (passed the exposure of over 1500 hours in a saline mist environment).
Screws	AISI 304 stainless steel screws.
Standard Colour	CO | Corten
Option colors	BE | embossed black, DN | embossed white, GM | Embossed green

Dimensions

Total device height (mm)	1005
Total device width (mm)	80

Optical System

Beam	diffuse
Emission	direct
Adjustable	No



Photometrics



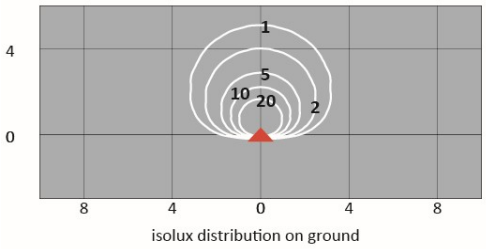

Sources

MacAdam	Step 3
Output Flux	376lm
Source type	LED
System power	6W
Temperature Colour	2700K CRI>80

Electrical

Lifetime	50.000h L80B20 (Ta=25°C)
Mounting ballast type	Remote, not included
Voltage	24V-DC
Separate ignition	No
Emergency 1E	No
Emergency 3E	No

Optional Accessories

Electrical

MEC10059
DRIVER ON-OFF IP67 24V 75W

MEC10058
DRIVER ON-OFF IP20 24V 60W

MEC10057
DRIVER ON-OFF IP67 24V 36W

MEC10056
DRIVER ON-OFF IP20 24V 35W

MEC10055
DRIVER ON-OFF IP67 24V 14W

MEC10054
DRIVER ON-OFF IP20 24V 10W

MEC10060
DRIVER ON-OFF IP20 24V 100W

MEC10061
DRIVER ON-OFF IP67 24V 150W

MEC10062
DRIVER DALI IP20 24V 25W

MEC10063
DRIVER DALI IP67 24V 25W

MEC10065
DRIVER DALI IP67 24V 60W

MEC10066
DRIVER DALI IP20 24V 80W

MEC10067
DRIVER DALI IP67 24V 90W

MEC10068
DRIVER DALI IP20 24V 160W

MEC10069
DRIVER DALI IP67 24V 120W