w222 Focal

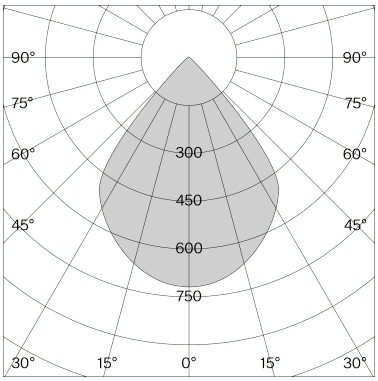

w222 Focal c



Technical information

Physical	
Material	Lamp body: aluminium Canopy: polycarbonate
Optics	Lens: PMMA Reflector: polycarbonate
IP rating	20
Protection class	I

LED	
Light source	COB LED (included)
Lifetime expectancy	L80 / 50,000 h
CRI Colour rendering index	90
Standard deviation of colour	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version	c
Mounting	Ceiling
LED Colour temperature (CCT) / Luminous flux	2700 K / 885 lm
Voltage / System power	220–240 V / 9.6 W
Efficacy	92 lm / W
Light control	Phase-cut dim / DALI dim-Push dim / Casambi
Net weight	0.48 kg
Packaging dimensions	L22.3 × W20.9 × H17.7 cm
Gross weight	0.85 kg

Phase-cut dim	**Art. No. / EAN code**
Traffic white (RAL 9016)	**222C102271** / 7330492001395
Jet black (RAL 9005)	**222C105271** / 7330492001401
Raw tumbled	**222C120271** / 7330492001449

DALI dim-Push dim	**Art. No. / EAN code**
Traffic white (RAL 9016)	**222C102272** / 7330492000367
Jet black (RAL 9005)	**222C105272** / 7330492000374
Pale red (NCS S 1010-Y90R)	**222C103272** / 7330492000381
Pale green (NCS S 2005-B50G)	**222C101272** / 7330492000398
Pale blue (NCS S 1010-R90B)	**222C106272** / 7330492000404
Raw tumbled	**222C120272** / 7330492001302

Accessories	**Art. No. / EAN code**
Casambi module	**DR-0601** / 7330492000510
Ceiling installation cover plate	**222-JC02** / 7330492002507
1-phase track adapter white	
1-phase track adapter black	
3-phase track adapter white	
3-phase track adapter black	
3-phase track DALI adapter white	
3-phase track DALI adapter black	

w222 Focal s



w222 Focal w



Article-specific information

Version	s	w
Mounting	Ceiling supsended	Wall
LED Colour temperature (CCT) / Luminous flux	2700 K / 885 lm	2700 K / 885 lm
Voltage / System power	220–240 V / 9.6 W	220–240 V / 9.6 W
Efficacy	92 lm / W	92 lm / W
Light control	Phase-cut dim / DALI dim-Push dim / Casambi	Phase-cut dim / DALI dim-Push dim / Casambi
Net weight	0.73 kg	0,48 kg
Packaging dimensions	L22.3 × W21.2 × H20 cm	L22.3 × W20.9 × H17.7 cm
Gross weight	1.2 kg	0.85 kg

Phase-cut dim	**Art. No. / EAN code**	**Art. No. / EAN code**
Traffic white (RAL 9016)	**222S102271** / 7330492001456	**222W102271** / 7330492001517
Jet black (RAL 9005)	**222S105271** / 7330492001463	**222W105271** / 7330492001524
Raw tumbled	**222S120271** / 7330492001500	**222W120271** / 7330492001562

DALI dim-Push dim	**Art. No. / EAN code**	**Art. No. / EAN code**
Traffic white (RAL 9016)	**222S102272** / 7330492000411	**222W102272** / 7330492000466
Jet black (RAL 9005)	**222S105272** / 7330492000428	**222W105272** / 7330492000374
Pale red (NCS S 1010-Y90R)	**222S103272** / 7330492000435	**222W103272** / 7330492000480
Pale green (NCS S 2005-B50G)	**222S101272** / 7330492000442	**222W101272** / 7330492000497
Pale blue (NCS S 1010-R90B)	**222S106272** / 7330492000459	**222W106272** / 7330492000503
Raw tumbled	**222S120272** / 7330492001319	**222W120272** / 7330492001326

Accessories	**Art. No. / EAN code**	**Art. No. / EAN code**
Casambi module	**DR-0601** / 7330492000510	**DR-0601** / 7330492000510
Ceiling installation cover plate		
1-phase track adapter white	**ACC00102** / 7330492001920	
1-phase track adapter black	**ACC00105** / 7330492001937	
3-phase track adapter white	**ACC00202** / 7330492001944	
3-phase track adapter black	**ACC00205** / 7330492001951	
3-phase track DALI adapter white	**ADAPT1-001** / 7330492001982	
3-phase track DALI adapter black	**ADAPT1-002** / 7330492001999	

w222 Focal r



Article-specific information

Version	r
Mounting	Semi recessed
LED Colour temperature (CCT) / Luminous flux	2700 K / 885 lm
Voltage / System power	220–240 V / 9.6 W
Efficacy	92 lm / W
Light control	Phase-cut dim / DALI dim-Push dim
Net weight	0.3 kg
Packaging dimensions	L16.1 × W14.5 × H10.6 cm
Gross weight	0.47 kg

Phase-cut dim	**Art. No. / EAN code**
Traffic white (RAL 9016)	**222R102271** / 7330492001371
Jet black (RAL 9005)	**222R105271** / 7330492001364
Raw tumbled	**222R120271** / 7330492001388

DALI dim-Push dim	**Art. No. / EAN code**
Traffic white (RAL 9016)	**222R102272** / 7330492001340
Jet black (RAL 9005)	**222R105272** / 7330492001333
Pale red (NCS S 1010-Y90R)	
Pale green (NCS S 2005-B50G)	
Pale blue (NCS S 1010-R90B)	
Raw tumbled	**222R120272** / 7330492001357

Accessories	**Art. No. / EAN code**
Casambi module	**DR-0601** / 7330492000510
Ceiling installation cover plate	
1-phase track adapter white	
1-phase track adapter black	
3-phase track adapter white	
3-phase track adapter black	
3-phase track DALI adapter white	
3-phase track DALI adapter black	