w225 Ion 3000 K narrow



w225 Ion 3000 K wide



w225 Ion b4040



Technical information

Physical	
Material	Lamp body & wall bracket: aluminium Base & pin: steel
Optics	Glare shade: polyamide Lens: polycarbonate
IP rating	20
Protection class	II

LED	
Light source	COB LED (included)
Lifetime expectancy	L80 / 50,000 h
CRI Colour rendering index	97
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version	b4040
Mounting	Base
LED Colour temperature (CCT) / Luminous flux	3000 K / 439 lm
Voltage / System power	100–240 V / 6.3 W
Efficacy	60 lm / W
Beam angle / Optics	Wide / Lens
Light control	Dimmable
Net weight	3.3 kg
Packaging dimensions	L58.3 × W31.6 × H10.1 cm
Gross weight	4.9 kg

2700 K Colour temperature (CCT)	**Art. No. / EAN code**
Traffic white (RAL 9016)	
Jet black (RAL 9005)	
Raw tumbled	

3000 K Colour temperature (CCT)	**Art. No. / EAN code**
Traffic white (RAL 9016)	**225B40400230W** / 7330492000541
Jet black (RAL 9005)	**225B40400530W** / 7330492000558
Raw tumbled	**225B40402030W** / 7330492001845

Accessories	**Art. No. / EAN code**
Adapter suitable for USM Haller Table	
Adapter suitable for USM Haller Shelf	
Adapter suitable for Vitra Joyn 2	
Adapter suitable for Vitra Tyde 2	
Narrow / Lens	**225-N01** / 7330492000688
Wide / Reflector & diffuser	
Packaging dimensions	**L64.8 x W31.6 x H10.1 cm (0.02 m³)**

w225 lon p4040

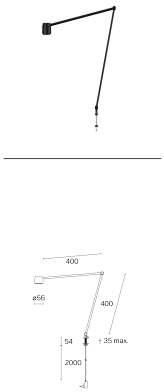

w225 lon b9040



Article-specific information

Version	p4040	b9040
Mounting	Pin - integrated (hole ø14 mm)	Floor base
LED Colour temperature (CCT) / Luminous flux	3000 K / 439 lm	2700 K / 380 lm 3000 K / 405 lm
Voltage / System power	100–240 V / 6.3 W	100–240 V / 6.3 W
Efficacy	60 lm / W	70 lm / W
Beam angle / Optics	Wide / Lens	Narrow / Lens
Light control	Dimmable	Dimmable
Net weight	0.48 kg	3.3 kg
Packaging dimensions	L58.3 × W31.6 × H10.1 cm	L104.4 × W36.3 × H10.1 cm
Gross weight	2.1 kg	6.8 kg

2700 K Colour temperature (CCT)	**Art. No. / EAN code**	**Art. No. / EAN code**
Traffic white (RAL 9016)		**225B90400227N** / 7330492000602
Jet black (RAL 9005)		**225B90400527N** / 7330492000619
Raw tumbled		

3000 K Colour temperature (CCT)	**Art. No. / EAN code**	**Art. No. / EAN code**
Traffic white (RAL 9016)	**225P40400230W** / 7330492000565	**225B90400230N** / 7330492000589
Jet black (RAL 9005)	**225P40400530W** / 7330492000572	**225B90400530N** / 7330492000596
Raw tumbled	**225P40402030W** / 7330492001852	

Accessories	**Art. No. / EAN code**	**Art. No. / EAN code**
Adapter suitable for USM Haller Table	**225ACC001** / 7330492002002	
Adapter suitable for USM Haller Shelf	**225ACC006** / 7330492002019	
Adapter suitable for Vitra Joyn 2	**225ACC002** / 7330492002026	
Adapter suitable for Vitra Tyde 2	**225ACC003** / 7330492002033	
Narrow / Lens	**225-N01** / 7330492000688	
Wide / Reflector & diffuser		**225-W02** / 7330492001913
Packaging dimensions		

w225 lon br4040



w225 lon br0

Article-specific information

Version	br4040	br0
Mounting	Wall bracket	Wall bracket
LED Colour temperature (CCT) / Luminous flux	3000 K / 439 lm	2700 K / 380 lm 3000 K / 405 lm
Voltage / System power	100–240 V / 6.3 W	100–240 V / 6.3 W
Efficacy	60 lm / W	70 lm / W
Beam angle / Optics	Wide / Lens	Narrow / Lens
Light control	Dimmable	Dimmable
Net weight	0.5 kg	0.4 kg
Packaging dimensions	L58.3 × W31.6 × H10.1 cm	L15.4 × W14.3 × H13.1 cm
Gross weight	2.2 kg	0.6 kg

2700 K Colour temperature (CCT)	**Art. No. / EAN code**	**Art. No. / EAN code**
Traffic white (RAL 9016)		**225BR00227N** / 7330492000664
Jet black (RAL 9005)		**225BR00527N** / 7330492000671
Raw tumbled		**225BR02027N** / 7330492001906

3000 K Colour temperature (CCT)	**Art. No. / EAN code**	**Art. No. / EAN code**
Traffic white (RAL 9016)	**225BR40400230W** / 7330492000626	**225BR00230N** / 7330492000640
Jet black (RAL 9005)	**225BR40400530W** / 7330492000633	**225BR00530N** / 7330492000657
Raw tumbled	**225BR40402030W** / 7330492001883	**225BR02030N** / 7330492001890

Accessories	**Art. No. / EAN code**	**Art. No. / EAN code**
Adapter suitable for USM Haller Table		
Adapter suitable for USM Haller Shelf		
Adapter suitable for Vitra Joyn 2		
Adapter suitable for Vitra Tyde 2		
Narrow / Lens	**225-N01** / 7330492000688	
Wide / Reflector & diffuser		**225-W02** / 7330492001913