w242 Pastille alu

w242 Pastille alu

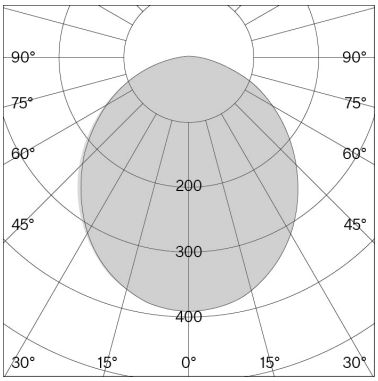

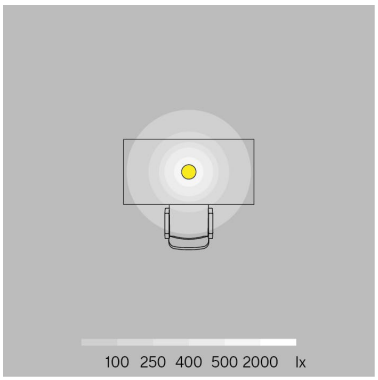

w242 Pastille alu b2

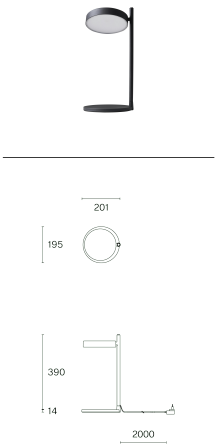

Technical information

Physical	
Material	Lamp body: aluminium Table base/clamp: aluminium & steel Pin/ bracket: aluminium Floor stand: steel
Optics	Reflector: ABS Diffuser: polycarbonate
IP rating	20
Protection class	II

LED	
Light source	COB LED (included)
Life time expectancy	L80 / 50,000 h
CRI Colour Rendering Index	95
Standard deviation of colour matching	3-step MacAdam
Replaceable by a professional	

The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The applicable General Terms & Conditions apply.

Article-specific information

Version	b2
Mounting	Base
LED Colour temperature (CCT) / Luminous flux	2700 K / 547 lm
Voltage / System power	100–240 V / 7.4 W
Efficacy	74 lm / W
Light control	Dimmable
Net weight	1.7 kg
Packaging dimensions	L51.0 × W23.2 × H7.8 cm (0.009 m³)
Gross weight	2.3 kg

Colour	**Art. No. / EAN code**
Traffic white (RAL 9016)	**242B20227** / 7330492011684
Jet black (RAL 9005)	**242B20527** / 7330492011745
Olive green (RAL 6003)	**242B20127** / 7330492011660
Oxide red (RAL 3009)	**242B20327** / 7330492011707
Raw tumbled	**242B22027** / 7330492011769
Telegray 4 (RAL 7047)	**242B20427** / 7330492011721
Accessories	**Art. No.** / EAN code
Adapter suitable for Vitra Joyn 2 / Tyde 2	
Adapter suitable for USM Haller table	
Adapter suitable for USM Haller shelf	

w242 Pastille alu c1

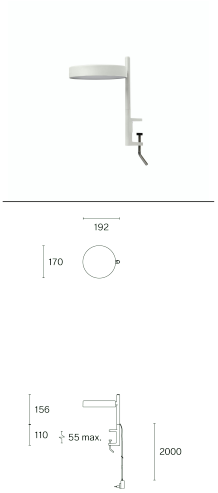

w242 Pastille alu c2

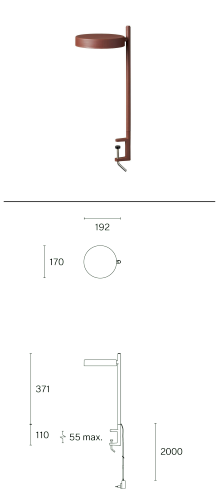

Article-specific information

Version	c1	c2
Mounting	Clamp	Clamp
LED Colour temperature (CCT) / Luminous flux	2700 K / 547 lm	2700 K / 547 lm
Voltage / System power	100–240 V / 7.4 W	100–240 V / 7.4 W
Efficacy	74 lm / W	74 lm / W
Light control	Dimmable	Dimmable
Net weight	0.6 kg	0.7 kg
Packaging dimensions	L36.0 × W22.3 × H5.2 cm (0.004 m³)	L51.0 × W23.2 × H7.8 cm (0.009 m³)
Gross weight	0.9 kg	1.3 kg

Colour	**Art. No. / EAN code**	**Art. No. / EAN code**
Traffic white (RAL 9016)	**242CL10227** / 7330492012162	**242CL20227** / 7330492012285
Jet black (RAL 9005)	**242CL10527** / 7330492012223	**242CL20527** / 7330492012346
Olive green (RAL 6003)	**242CL10127** / 7330492012148	**242CL20127** / 7330492012261
Oxide red (RAL 3009)	**242CL10327** / 7330492012186	**242CL20327** / 7330492012308
Raw tumbled	**242CL12027** / 7330492012247	**242CL22027** / 7330492012360
Telegray 4 (RAL 7047)	**242CL10427** / 7330492012209	**242CL20427** / 7330492012322
Accessories	**Art. No.** / EAN code	**Art. No.** / EAN code
Adapter suitable for Vitra Joyn 2 / Tyde 2		
Adapter suitable for USM Haller table		
Adapter suitable for USM Haller shelf		

w242 Pastille alu p2

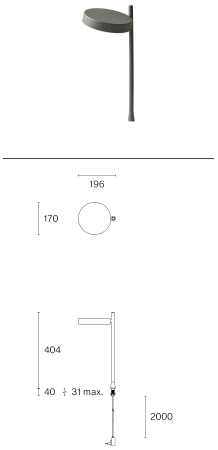

w242 Pastille alu f2

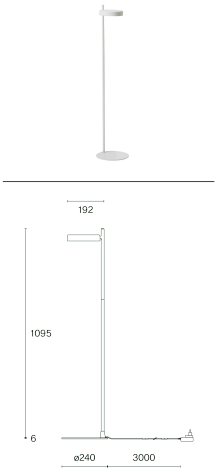

Article-specific information

Version	p2	f2
Mounting	Pin – Integrated (hole ø 20 mm)	Floor base
LED Colour temperature (CCT) / Luminous flux	2700 K / 547 lm	2700 K / 547 lm
Voltage / System power	100–240 V / 7.4 W	100–240 V / 7.4 W
Efficacy	74 lm / W	74 lm / W
Light control	Dimmable	Dimmable
Net weight	0.7 kg	3.6 kg
Packaging dimensions	L51.0 × W23.2 × H7.8 cm (0.009 m³)	L119.6 × W28.8 × H6.8 cm (0.02 m³)
Gross weight	1.3 kg	5.5 kg

Colour	**Art. No. / EAN code**	**Art. No. / EAN code**
Traffic white (RAL 9016)	**242P20227** / 7330492012568	**242F20227** / 7330492012469
Jet black (RAL 9005)	**242P20527** / 7330492012629	**242F20527** / 7330492012520
Olive green (RAL 6003)	**242P20127** / 7330492012544	**242F20127** / 7330492012445
Oxide red (RAL 3009)	**242P20327** / 7330492012582	**242F20327** / 7330492012483
Raw tumbled	**242P22027** / 7330492012643	
Telegray 4 (RAL 7047)	**242P20427** / 7330492012605	**242F20427** / 7330492012506
Accessories	**Art. No.** / EAN code	**Art. No.** / EAN code
Adapter suitable for Vitra Joyn 2 / Tyde 2	**242-ADAPT001** / 7330492011639	
	242-ADAPT002 / 7330492011646	
Adapter suitable for USM Haller table	**242-ADAPT003** / 7330492011653	
Adapter suitable for USM Haller shelf		

w242 Pastille alu br1

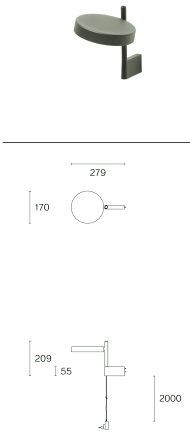

w242 Pastille alu br2

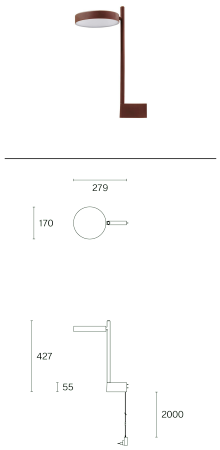

Article-specific information

Version	br1	br2
Mounting	Wall bracket	Wall bracket
LED Colour temperature (CCT) / Luminous flux	2700 K / 547 lm	2700 K / 547 lm
Voltage / System power	100–240 V / 7.4 W	100–240 V / 7.4 W
Efficacy	74 lm / W	74 lm / W
Light control	Dimmable	Dimmable
Net weight	0.6 kg	0.6 kg
Packaging dimensions	L36.0 × W22.3 × H5.2 cm (0.004 m³)	L51.0 × W23.2 × H7.8 cm (0.009 m³)
Gross weight	0.9 kg	1.3 kg

Colour	**Art. No. / EAN code**	**Art. No. / EAN code**
Traffic white (RAL 9016)	**242BR10227** / 7330492011868	**242BR20227** / 7330492011981
Jet black (RAL 9005)	**242BR10527** / 7330492011929	**242BR20527** / 7330492012049
Olive green (RAL 6003)	**242BR10127** / 7330492011844	**242BR20127** / 7330492011967
Oxide red (RAL 3009)	**242BR10327** / 7330492011882	**242BR20327** / 7330492012001
Raw tumbled	**242BR12027** / 7330492011943	**242BR22027** / 7330492012063
Telegray 4 (RAL 7047)	**242BR10427** / 7330492011905	**242BR20427** / 7330492012025
Accessories	**Art. No.** / EAN code	**Art. No.** / EAN code
Adapter suitable for Vitra Joyn 2 / Tyde 2		
Adapter suitable for USM Haller table		
Adapter suitable for USM Haller shelf		