FLOS

09.3781.30A White

Find Me 0 (Trim/No Trim)

Designed by Jorge Herrera

Recessed adjustable luminaire for indoor application. Remote power supply 250 mA not included.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT

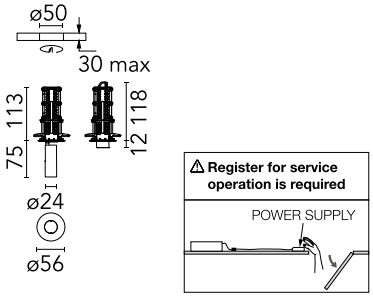

Main specifications

Mounting	Ceiling recessed
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Power LED
Lamp category	LED
Number of lamps	1
Power (W)	3
Source flux (lm)	300
System flux (lm)	170

Physical

Colour	White
Orientation	Adjustable
Rotation (°)	360
Longitudinal tilting (°)	90
Recessed depth (mm)	135
Spot diameter (mm)	24
Net weight (kg)	0.14
IP internal	20

Download

Mounting instructions PDF

Photometric Files

LDT / IES ZIP

Technical Drawings

2D ZIP

3D ZIP

GWT 850° IP 20

Ecodesign and Energy Labelling

Replaceable (LED only) light source by a professional

©2022 Flos - P.IVA 00290820174 - 4/4/2025

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

Schematic light drawing



Luminous flux luminaire
170 lm (EXTREME CUT OFF)

Beam Angle: 26°

h(m)	E(lx)	D(m)
1	786	0.45
2	197	0.91
3	87	1.36
4	49	1.82
5	31	2.27

Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	90
Rf fidelity index	91
Rg gamut index	98
LED Life / Failure Ratio	L80B20 >36000h (Tc=85°C)
Beam angle C0-180 (°)	26
Beam angle C90-270 (°)	26
UGR_L	<10

Electrical

Insulation class	III
Frequency (Hz)	0
Forward voltage (V)	12
LED current (mA)	250
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Non Dimmable, Dimmable DALI 2, Dimmable 0-10V, Dimmable Casambi, Mains Cut Dimming

Notes

Accessories included (honeycomb and screening crosspiece). Remote power supply to be installed in an accessible place. It is not recommended to use dimmable drivers of several brands due to the specific dimming curves of each brand. To use only one driver for various spots, connect the spots in series.

©2022 Flos - P.IVA 00290820174 - 4/4/2025

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

REQUIRED
Control interface

Electrical

60.9392

Casambi controller. Requires 1-10V or Dali driver. It must be ordered separately

REQUIRED
Power supply

Electrical

60.9405

Constant voltage supply source of 20W, 100-240V - 50/60Hz with adjustable 250 mA supply voltage. Dimmable 0-10V

REQUIRED
Power supply

Electrical

60.9160

Non dimmable continuous current power supply of 220/240V - 50/60Hz with power current selected through adjustable with switch 200 mA - 8,5W / 250mA - 11W / 300 mA - 13W / 350 mA - 15W / 400 mA - 17,5W / 450 mA - 19,5W / 500 mA - 22W

REQUIRED
Power supply

Electrical

60.9601

Constant voltage supply source of 20W, 100-240V - 50/60Hz with adjustable 250 mA supply voltage. Dimmable DALI



REQUIRED
Power supply

Electrical

60.9744

Constant voltage supply source of 10W, 100-240V - 50/60Hz with non adjustable 250 mA supply voltage

REQUIRED
Power supply

Electrical

60.9949

Continuous current power supply of 7,2-24W, 220/240V - 50/60Hz with power current selected through adjustable switch. 200mA - 8W / 250mA - 10W / 300mA - 12W / 350mA - 14W. Trailing & leading edge, mains dimming.

©2022 Flos - P.IVA 00290820174 - 4/4/2025

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.

©2022 Flos - P.IVA 00290820174 - 4/4/2025

In our constantly evolving world and business, technical upgrades happen every day. This means all product specifications and data are subject to change without warning in order t improve reliability, function, performance or otherwise. We make every effort to ensure the accuracy of our product images, however due to different lighting and screens used for viewing, the colours may vary. Images are indicative of the quality and style of the product but may not represent the precise details of the product you receive. This is because we are constantly working to make improvements. For aesthetic reasons, cables and/or electrical elements are often not shown. Refer to technical data sheets for all technical data. Images and colours are not part of any contract or warranty in any way.